



Engine	Cummins QSB 5.9-C150-31
Rated Power	113 kW (152 hp / 154 ps) @ 2,200 rpm
Operating Weight	12,000 kg
Standard Bucket Size	2.0 m ³
Standard Breakout Force	134 kN
Standard Dump Clearance	2,900 mm

838T WHEEL LOADER

TOUGH WORLD. TOUGH EQUIPMENT.

838T SPECIFICATIONS >>>

ENGINE	
Emission Regulation	Tier 3 / Stage III
Manufacturer	Cummins
Model	QSB 5.9-C150-31
Rated Power	113 kW (152 hp / 154 ps) @ 2,200 rpm
Peak Torque	690 N·m @ 1,100~1,500 rpm
Displacement	5.9 L
Number of Cylinder	6
Aspiration	Turbocharged & Air-to-air intercooled

TRANSMISSION	
Transmission Type	Electric proportional, power shift
Maximum Travel Speed, fwd	38 km/h
Maximum Travel Speed, rev	27 km/h
Number of Speed, fwd	4
Number of Speed, Rev	3

AXLES	
Differential Front Type	Conventional
Differential Rear Type	Conventional
Axle Oscillation	±10°

STEERING	
Steering Configuration	Load sensing hydraulic steering
Steering Relief Pressure	18 MPa

BRAKES	
Service Brake Type	Wet discs brake
Service Brake Actuation	Full hydraulic
Parking Brake Type	Drum
Parking Brake Actuation	Electro-hydraulic release

HYDRAULIC SYSTEM	
Main Pump Type	Piston
Main Relief Pressure	26 MPa
Raise	4.8 s
Dump Time	1.1 s
Float Down Time	3.1 s
Fastest Total Cycle Time	9.0 s

LOADER ARM PERFORMANCE WITH STANDARD BUCKET 2.0 m³	
Tipping Load - Straight (ISO 14397-1:2007)	8,870 kg
Tipping Load - Full Turn (ISO 14397-1:2007)	7,650 kg
Bucket Breakout Force	134 kN
A Maximum Hinge Pin Height	3,801 mm
B Dump Clearance at Full Height Discharge	2,900 mm
C Dump Reach at Full Height Discharge	1,119 mm
D Maximum Digging Depth, Bucket Level	90 mm
S ₁ Rollback at Ground Level	42 °
S ₂ Bucket Rollback at Carry	48 °
S ₃ Bucket Rollback at Maximum Height	56 °
S ₄ Maximum Dump Angle at Full Height	45 °



BUCKET PERFORMANCE	
Reference Bucket	1.5-3.2 m³

DIMENSIONS	
E Ground Clearance	323 mm
G Wheelbase	2,870 mm
H Cab Height	3,360 mm
J Wheel Tread	1,950 mm
K Width over Tires	2,395 mm
L Length with Bucket Down	7,203 mm
M Turn Angle, Either Side	40 °
P Rear Angle of Departure	28 °
R ₁ Turning Radius, Bucket Carry	5,777 mm
R ₂ Turning Radius, Outside of Tire	4,940 mm
W Width over Bucket	2,500 mm

TIRES	
Tire Size	17.5-25 PR12 L-3 TT

OPERATING WEIGHTS	
Operating Weight	12,000 kg

SERVICE CAPACITY	
Fuel Tank	220 L
Engine Oil	16 L
Cooling System	30 L
Hydraulic System	140 L
Transmission	40 L
Axles, Front/Rear	22 L

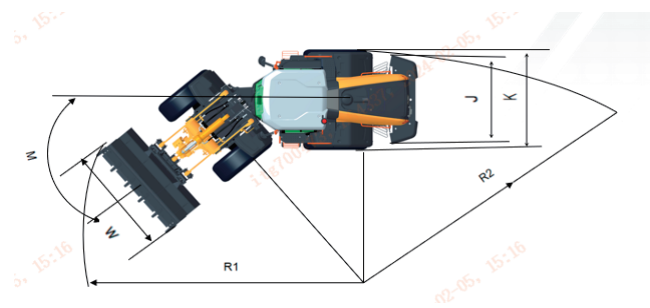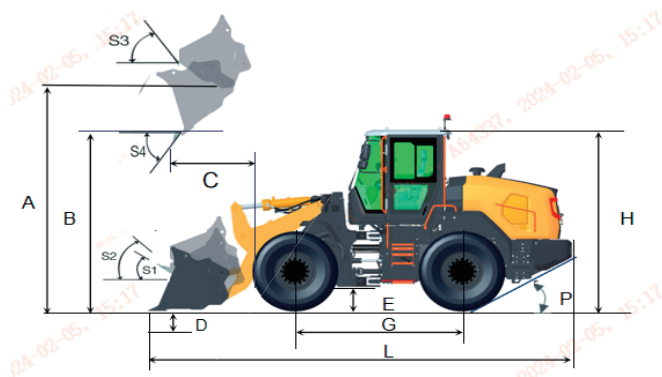

Guangxi Liugong Machinery Co., Ltd.

No. 1 Liutai Road, Liuzhou, Guangxi 545007, PR China
T: +86 772 3886124 E: overseas@liugong.com
www.liugong.com

Specifications and designs are subject to change without notice. Machines shown may include optional equipment. Liugong standard and optional equipment may vary from region to region. Please consult your Liugong dealer for information specific to your area. Engine power kW is converted to horsepower (1 kW=1.3596 ps and 1 kW=1.3410 hp) in this file.

11/2024 Designed by LiuGong